


Tree Planting With Truck Spade

Not To Scale

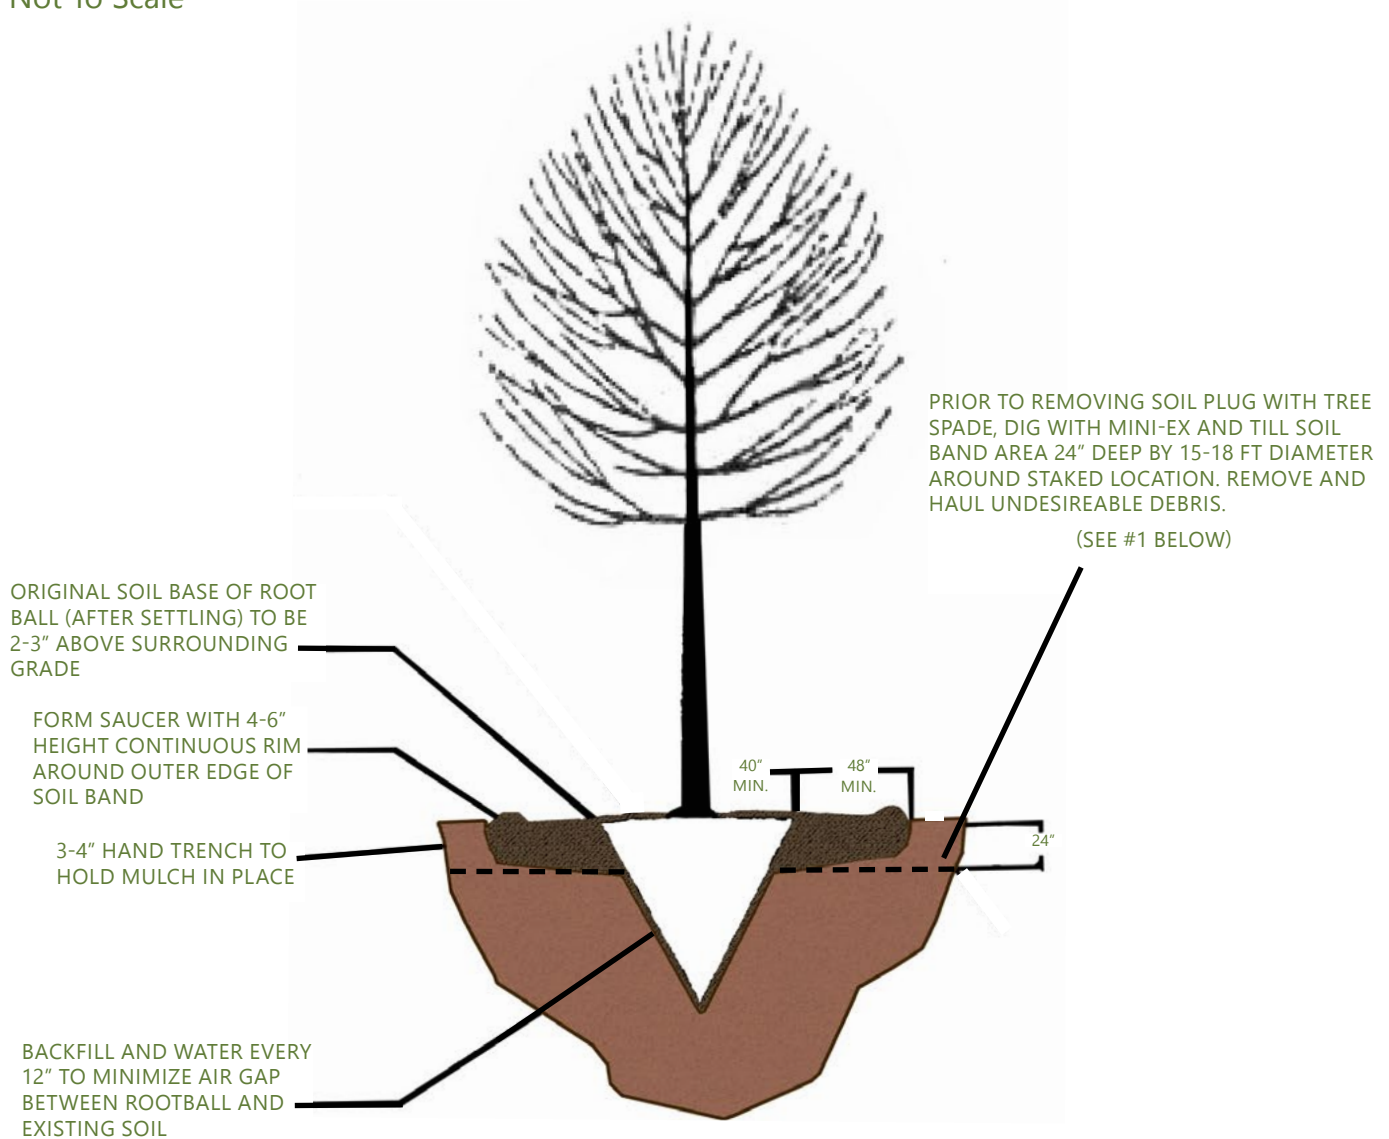

TREE PLANTING SEQUENCE

1. PRIOR TO REMOVING SOIL PLUG WITH TREE SPADE, DIG WITH MINI-EX AND TILL SOIL BAND AREA 24" DEEP BY 15-18 FT DIA. AROUND STAKED LOCATION. REMOVE AND HAUL UNDESIREABLE DEBRIS.
2. DIG 80-90"DIA. PLUG USING TRUCK-MOUNTED TREE SPADE. SCARIFY SIDES OF PLUG HOLE TO A DEPTH OF 40" BELOW FINISHED GRADE IN VERTICAL STRIPS (8" O.C.) 2" WIDE AND 2" DEEP. ANY CLEAN SOIL REMOVED FROM THE PITS AT PROJECT SITE TO BE DEPOSITED AT NURSERY IN PREVIOUS LOCATION SPECIFIED BY NURSERY.
3. HARVEST SPECIFIED TREE AT NURSERY GROWING OPERATION.
4. TIE, TARP, AND TRANSPORT TREE TO SPECIFIED LOCATION.
5. TREE SHALL BE STRAIGHT, PLUMB, AND WATERED-IN PRIOR TO COMPLETE REMOVAL OF TREE SPADE FROM PLANTING PIT.
6. IMMEDIATELY AFTER PLANTING & THE TREE IS STRAIGHT & PLUMB, STAKE TREE TO PROVIDE STABILITY UNTIL ROOT SYSTEM IS THOROUGHLY ESTABLISHED IN THE BACKFILL. CHECK STAKING AS NEEDED TO MAKE SURE TRUNK DAMAGE DOES NOT OCCUR. CHECK TO CONFIRM THAT TREE IS ESTABLISHED AND ROOT BALL IS STABLE BEFORE REMOVING STAKING FROM THE PLANTING WITH TREE SPADE.
7. INSTALL 1.5-2" DEPTH, SINGLE GROUND HARDWOOD, MULCH, OR PINE STRAW, WITHIN 24 HOURS OF TREE PLANTING. MULCH SHALL NOT HAVE CONTACT WITH TREE TRUNK. MAINTAIN 6" SPACE BETWEEN TREE TRUNK AND START OF MULCH.